



INSTALLATION INSTRUCTIONS

The device ships with one smart IP ceiling speaker and one ancillary (analog) ceiling speaker, as well as a ferrite for optional usage. For any concerns over line performance, wrap CAT5/CAT6 Ethernet cable around ferrite once and clamp shut.




IPSCM-RM-CB ASSEMBLY FOR SUSPENDED CEILING

1. Begin with the ancillary (analog) IPSCM-RM speaker. Align the IPSCM-RM-CB bridge on the tile, such that the support legs end at the tile edges and mark along the round section; rotate bridge 90° to mark remainder of hole. Use caution when handling the bridge as it contains sharp edges.
2. Cut ceiling tile along the marked circle.
3. Place the speaker-only assembly on flat surface, magnet side up.
4. Center ceiling tile over the speaker.
5. Place the IPSCM-RM-CB bridge over the baffle assembly with two studs of the speaker baffle running through the two small oval holes of the bridge.
6. Secure speaker assembly, tile, and IPSCM-RM-CB bridge together with the two #8-32 nuts provided in the bag attached to the speaker magnet.
7. Attach included cable assembly to the speaker blade terminals.
8. Install back box (IPSCM-RM-BB) if necessary, per instructions in next section.
9. Tie off the unit to the building structure if required using the straps on the back box, then place entire assembly into ceiling and run speaker cable to location of the smart IP Speaker (with circuit board).
10. Repeat steps 1-6 for the smart IP speaker.
11. Attach other end of the speaker cable into the two available speaker terminals on connector J5 of the control board. If J5 is black, use a strip length of 5mm and tighten the screws; if J5 is green, use a strip length of 8 mm and push down before inserting the cable.
12. Complete the Ethernet cable run to the smart IP speaker.
13. Install back box (IPSCM-RM-BB) if necessary, per instructions in next section.
14. Complete any additional wiring for accessories, then connect the Ethernet cable to Ethernet jack J3 on the control board.
15. Secure IPSCM-RM-BB back box if used, tie off unit to building structure if required using straps on the back box, then place entire assembly into ceiling.

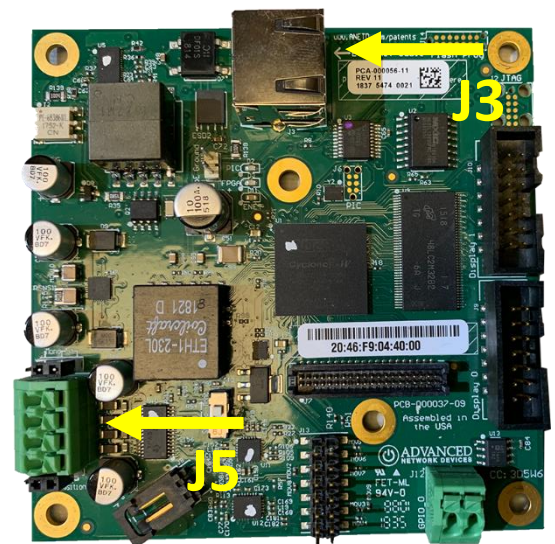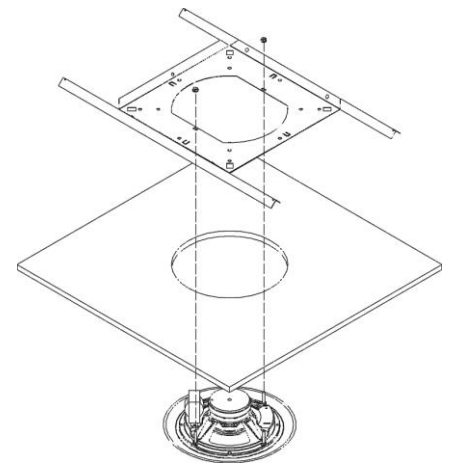


IPSCM-RM-BB ASSEMBLY (OPTIONAL)

1. Remove knockout from desired location in IPSCM-RM-BB backbox.
2. Bend up 4 horseshoe tabs on IPSCM-RM-CB bridge until they are perpendicular to bridge surface.
3. Run wiring, and conduit if necessary, through the knockout and make proper connections to the speaker and/or circuit board.
4. Push snap-on tie off straps through holes in rim of IPSCM-RM-BB backbox (where required).
5. Secure IPSCM-RM-BB back box to IPSCM-RM-CB bridge by inserting horseshoe tabs through the appropriate slots in the back box and twist with pliers.

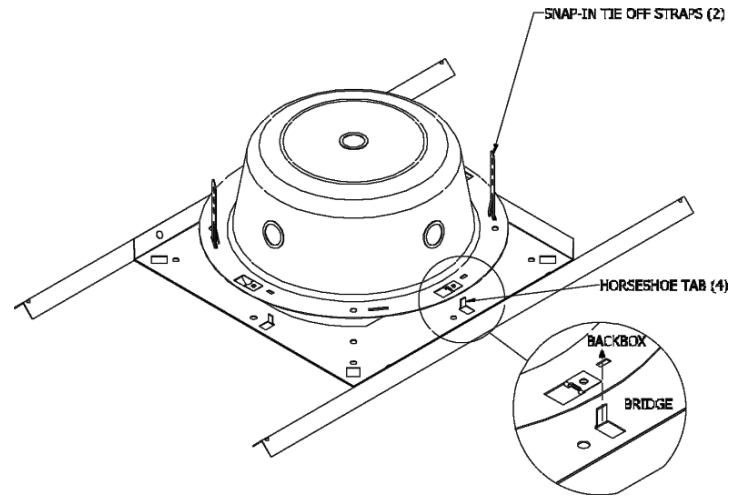

IPSCM-RM-DB ASSEMBLY FOR SHEETROCK CEILINGS

1. Cut out an 8-1/2" diameter hole in the ceiling where the speaker is to be installed.
2. Insert two IPSCM-RM-DB dry wall clips onto the speaker studs at opposite ends of the speaker that do not contain a threaded nut (see Figure "D"). Secure the clips to the baffle using the two #8-32 nuts provided in the bag attached to the speaker magnet.
3. Make proper connections to the board or speaker per the IPSCM-RM-CB instructions.
4. Holding a clip temporarily open, slide one side of the unit into the ceiling cavity, then slowly release the clip. Open the second clip and slide the remainder of the assembly into the cavity and release the clip to secure the assembly to the ceiling surface. Use caution when handling and opening the clips as they contain sharp edges.

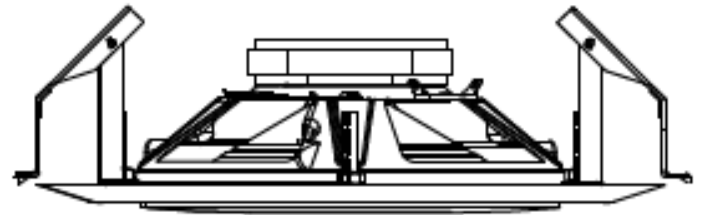

TROUBLESHOOTING AND ADDITIONAL RESOURCES

User Support:

<https://www.anetd.com/user-support/>

Technical Resources:

<https://www.anetd.com/user-support/technical-resources/>

AND Limited Warranty:

<https://www.anetd.com/warranty>

AND Legal Disclaimer:

<https://www.anetd.com/legal>