



### OVERVIEW

The PoE+ Double-Sided HD IP Display with matte black finish (IPCSHD-DS-MB) works well for corridors, hallways, and any space that requires viewing from both sides. The universal mount provides the option to mount from the wall or ceiling. The angled-display reduces glare and improves readability.

#### AUDIO



Two 4" high-efficiency speakers  
Audio coverage up to 600 ft<sup>2</sup> on each side

#### MICROPHONE




Hands-free talk back  
Monitoring

#### FLASHING INDICATOR



RGB flashing LED indicator.  
Customize for additional visual  
messaging in any color.

#### DISPLAY



1920 x 720 HD resolution  
Full-color spectrum  
Viewable up to 50ft on each side  
Angled display to reduce glare

#### MOUNTING



Mount from wall or ceiling  
Ease of install design

#### SOFTWARE



Diagnostic software included  
Compatible with third-party  
software, including InformaCast,  
Revolution, and Cisco CallManager

#### SIP INTEGRATION



SIP-enabled  
Easily interfaces with  
VoIP/SIP phone systems

### SOLUTIONS

- Paging
- Intercom
- Bell scheduling
- Code alerts
- Emergency notification
- Access control
- Security monitoring
- Music streaming

### ADDITIONAL FEATURES

- Built-in web server
- Full multicast and broadcast support
- Atomic time

## SOFTWARE

The IPCSHD-DS-MB integrates easily with third-party mass notification software, as well as SIP and VoIP phone systems, enabling a facility to take advantage of all the device capabilities. The device also comes with diagnostic software (compatible to run alongside third-party software), and an on-board web server interface, both which provide the ability to monitor and troubleshoot the ANetD devices on the network.

### Third-Party Software

- InformaCast (Singlewire)
- Revolution (Syn-Apps)
- IPSession (IPCelerate)
- MessageNet Systems
- BellComander (Acro Vista)
- And more!

### VoIP Phone Systems


- Cisco CallManager
- Mitel
- Avaya
- 3CX
- Polycom
- And more!

### IPClockWise


- Diagnostic tool included with device purchase
- Complements investment in third-party software
- Developed and supported by Advanced Network Devices

## DIMENSIONS


Wall Mount Front

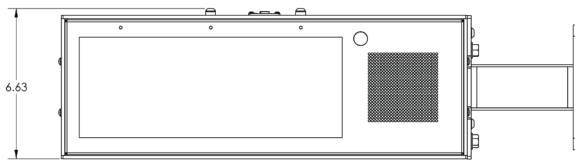


Wall Mount Top

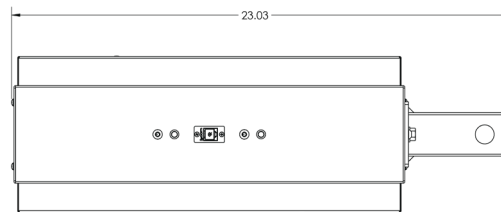


Wall Mount Side




Ceiling Mount Front

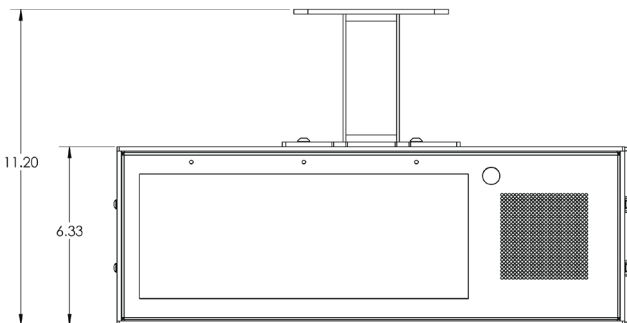

Ceiling Mount Top

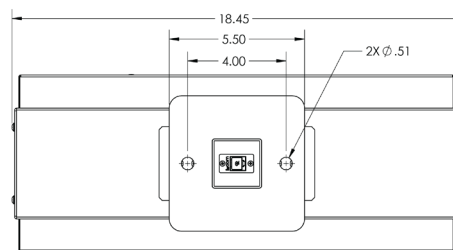

Ceiling Mount Side

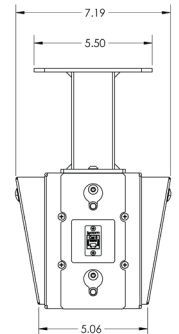

## SPECIFICATIONS

## IPCSHD-DS-MB

ETHERNET I/F	10/100/1000 Mbps
SPEAKER SIZE	4"
AVERAGE SENSITIVITY	94dB, 1W /1 M
FREQUENCY RESPONSE	150 Hz - 17 kHz
AUDIO PAYLOAD TYPES	G711, A-law and $\mu$ -law
POWER INPUT	PoE+ (IEEE802.3at) 30.0 W
SUPPORTED PROTOCOLS	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
OPERATING TEMPERATURE	-10° TO 50° C (14° TO 122° F)
DIMENSIONS	Wall Mount: 22.03" W x 6.63" H x 7.19" D (including mount) Ceiling Mount: 18.45" W x 11.20" H x 7.19" D (including mount)
WEIGHT	22 lbs (9.98 kg)
WARRANTY	2 Year Limited * This model has no user-serviceable internal components. Opening the unit will void the warranty. Contact AND Tech Support for assistance.

Due to continual product development, specifications are subject to change without notice.

Advanced Network Devices | 3820 N. Ventura Dr. Arlington Hts. IL 60004

847-463-2236 | sales@anetd.com | www.anetd.com

