



OVERVIEW

The PoE / PoE+ HD IP Display with matte black finish works well for offices, classrooms, and any average-sized room.

AUDIO



4" high-efficiency speaker
Audio coverage up to
600 ft²

MICROPHONE




Hands-free talk back
Monitoring

FLASHING INDICATOR



Configurable RGB LED
indicator for any emergency
code color

DISPLAY



1920 x 720 high resolution
Full-color HD screen
Viewable up to 50ft
Angled display to reduce glare

ANALOG INTEGRATION



Connect strobes, motion
sensors, electronic locks,
call buttons, etc.

SOFTWARE



Diagnostic software included
Compatible with third-party
software, including InformaCast,
Revolution, and Cisco CallManager

SIP INTEGRATION



SIP-enabled
Easily interfaces with
VoIP/SIP phone systems

SOLUTIONS

- Paging
- Intercom
- Bell scheduling
- Code alerts
- Emergency notification
- Access control
- Security monitoring
- Music streaming

ADDITIONAL FEATURES

- Built-in web server
- Full multicast and broadcast support
- Requires Cat5 or Cat6 cable
- Back enclosure is included
- Atomic time
- 2 general purpose inputs
- 1 general purpose output relay

COMPATIBLE PERIPHERALS

Strobe Kit
AND-STROBE-KIT-1

Call Button Kit
AND-BTN-KIT-1

SOFTWARE

The IPCSHD-MB integrates easily with third-party mass notification software, as well as SIP and VoIP phone systems, enabling a facility to take advantage of all the device capabilities. The device also comes with diagnostic software (compatible to run alongside third-party software), and an on-board web server interface, both which provide the ability to monitor and troubleshoot the ANetD devices on the network.

Third-Party Software

- InformaCast (Singlewire)
 - Revolution (Syn-Apps)
 - IPSession (IPCelerate)
 - MessageNet Systems
 - BellComander (Acro Vista)
- And more!


VoIP Phone Systems

- Cisco CallManager
 - Mitel
 - Avaya
 - 3CX
 - Polycom
- And more!

IPClockWise

- Diagnostic tool included with device purchase
- Complements investment in third-party software
- Developed and supported by Advanced Network Devices

DIMENSIONS

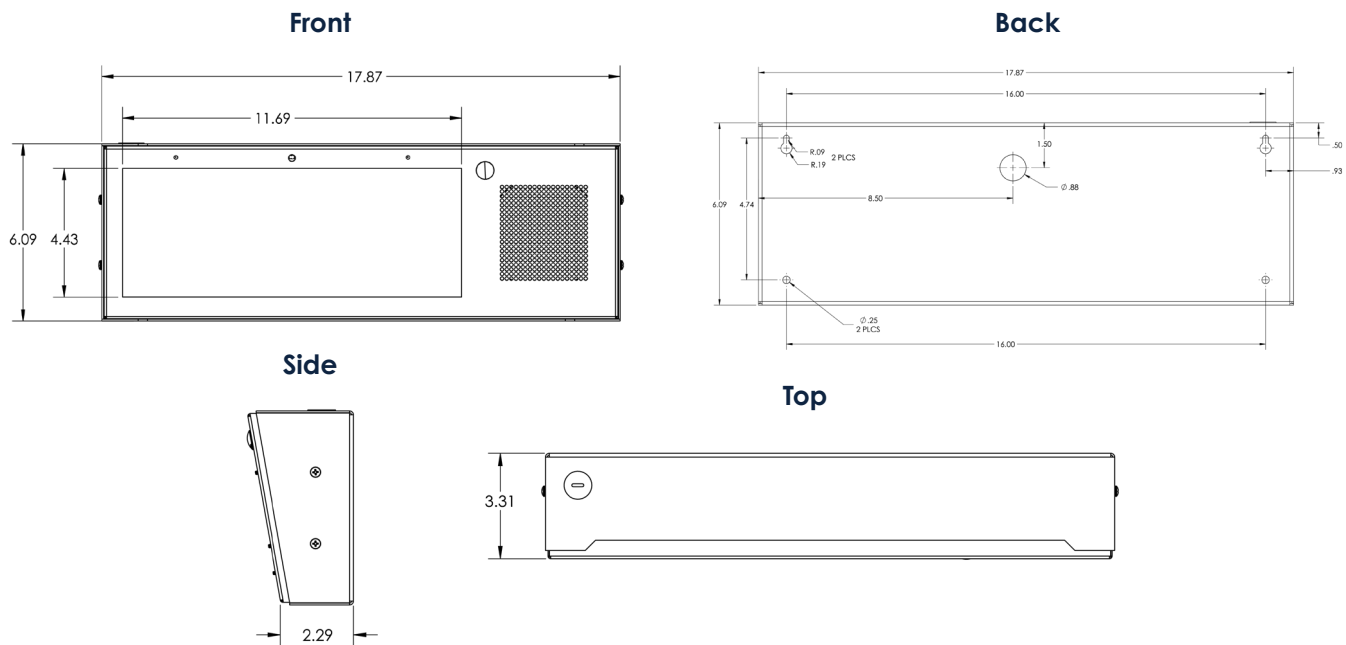

SPECIFICATIONS

IPCSHD-MB

| | |
|-----------------------|--|
| ETHERNET I/F | 10/100/1000 Mbps |
| SPEAKER SIZE | 4" |
| AVERAGE SENSITIVITY | 94dB, 1W /1 M |
| FREQUENCY RESPONSE | 150 Hz - 17 kHz |
| AUDIO PAYLOAD TYPES | G711, A-law and μ -law |
| POWER INPUT | PoE (IEEE802.3af) 15.5W or PoE+ (IEEE802.3at) 30.0W (recommended) |
| SUPPORTED PROTOCOLS | SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD |
| OPERATING TEMPERATURE | 14° TO 122° F (-10° TO 50° C) |
| DIMENSIONS | 17.9" W x 6.1" H x 3.3" D |
| WEIGHT | 9.1 lbs (4.1 kg) |
| WARRANTY | 2 Year Limited |

Due to continual product development, specifications are subject to change without notice.

